



ENFIS UNO Plus Array Hi Cri

Rich Hi Cri spot-source colour/CCT changing with 36 high-power LED's in just 1cm²

Features & Benefits

- Intense, high-power White light spot source
- Superior colour-mixing via dense packaging and interleaving of colours
- Addition of the Amber channel improves the richness of colour-mix over conventional RGB technology
- Enables active monitoring of light output via embedded smart array technology
- Long-life and reliable, high-performance due to excellent thermal conductivity
- Simple integration via connectorized PCB with mounting holes

Outline Specification

- Typical power:
 - R/A: 260 Lumens
 - G: 350 Lumens
 - B: 100 Lumens
 - W: 350 Lumens
- > 1000 Lumens (all channels on)
- 1.15cm² Aperture
- Input Power: 50W
- Typical thermal resistance <0.8°C/W

Light Engine Integration

Enfis can eliminate the time, cost and risk of integration by offering our arrays as part of a complete light engine solution

Smart Array Technology

Light output from the Enfis arrays can be monitored and controlled via patent-pending integrated photo-detection system, enabling precise control of light output.

Thermal Management

Enfis arrays are designed to provide excellent thermal conductivity and to be integrated effectively with thermal hardware to ensure optimum performance and life

Optics


Enfis Uno arrays provide excellent spot source with Lambertian emission characteristics. Enfis technical experts can advise a range of optical solutions to match your requirements.

Power Management

Enfis provides a range of feature-rich, powerful drivers and power supplies for our arrays. Our applications team can provide you with a solution for your specific requirements.

Applications & Markets

- Architectural lighting
 - Exterior buried spotlights
 - Exterior floodlights
 - Exterior/interior wall-washing
 - Interior colour/CCT-variable lighting
- Entertainment lighting
 - Club/bar lighting
 - Theatre spot gel replacement
 - Moving spots
- Retail lighting
 - Colour/CCT-variable spotlights
 - Display lighting
- Fibre optic lighting
 - Colour/CCT-changing illuminator light sources

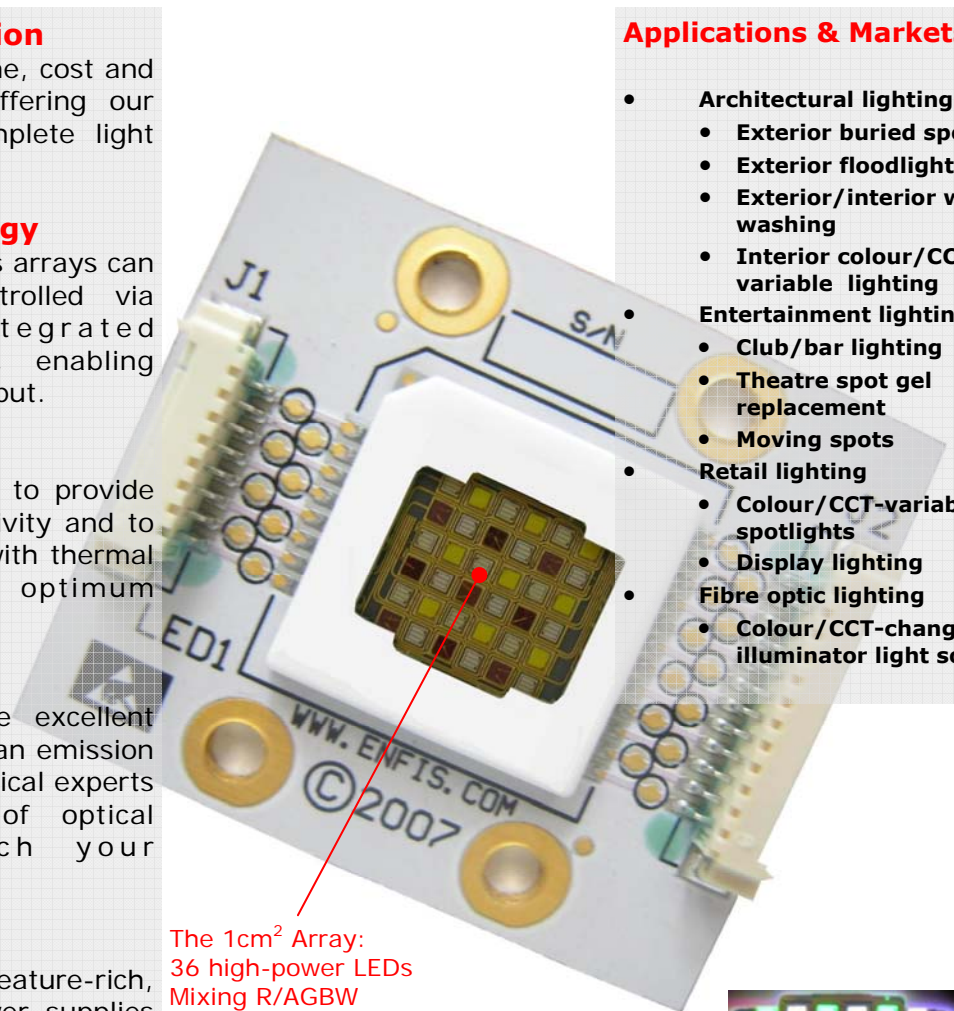

The 1cm² Array:
36 high-power LEDs
Mixing R/AGBW



ENFIS LIMITED
Technium 2, Kings Road,
Swansea Waterfront,
Swansea, SA18PJ, UK
Tel +44 (0)1792 485660
Fax +44 (0)1792 485537
www.enfis.com
info@enfis.com






ENFIS UNO Plus Array Hi Cri

Technical Specification

Electro-Optical Characteristics

Channel	Red / Amber			Green			Blue			White		
Item	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max
Rated Current If (mA)		550			440			388			400	
Forward Voltage Vf (Volts)	19	23	27	24	28	32	28	32	36	27	31	35
Peak Wavelength λ_p (nm)	620	630	640	510	520	530	450	465	470			
Dominant Wavelength λ_d (nm)	600	610	620	518	528	538	455	470	475			
Spectral Width $\Delta\lambda$ (nm)	12	16	20	32	37	42	15	23	30			
Colour Temperature CCT (K)										3900	4250	4600
Total Radiant Flux Φ_R (mW)	900	1000		750	850		1500	1800				
Radiant Flux Density Φ_R/A (mW/cm ²)	783	870		652	739		1304	1565				
Total Luminous Flux Φ_L (Lumens)	200	260		300	350		80	100		300	350	
Luminous Flux Density Φ_L/A (lm/cm ²)	174	226		174	304		70	87		261	304	
Total Electrical Power P (W)		12.5			12.5			12.5			12.5	

All measurements performed at a heatsink temperature of 25°C and each Channel is capable of up to 20W for increased light output

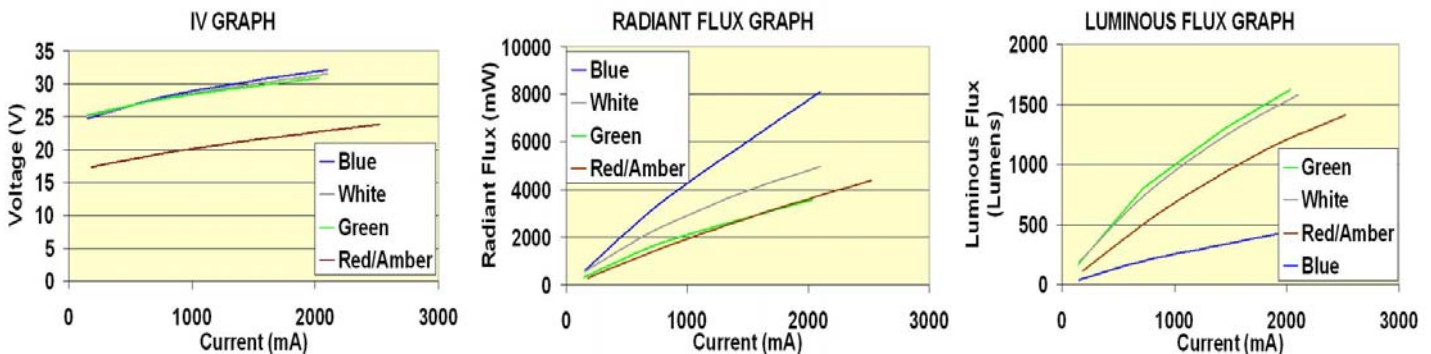

Heat Generation

Proper thermal design of the end product is of paramount importance. The operational junction temperature of each LED chip should be kept below 125°C.

Please contact Enfis for further support in this matter.

Handling LED Array

Contact with the encapsulation on the surface of the LED array must be avoided to prevent damage.

Do not apply pressure to the encapsulation or allow it to come into contact with sharp objects.

During operation the encapsulation will be hot and contact should be avoided

Static Electricity

Care must be taken when handling, these products are sensitive to static electricity.

Observe static handling precautions.



Cleaning

Avoid touching the LED array surface.

To clean—BLOW surface with either dry air or nitrogen gas

Eye Safety Precautions

The light output of the products may cause injuries to human eyes in circumstances where the products are viewed directly with unshielded eyes for more than a few seconds.

Please refer to IEC 60825-1:2001 for further information



ENFIS LIMITED
Technium 2, Kings Road,
Swansea Waterfront,
Swansea, SA18PJ, UK
Tel +44 (0)1792 485660
Fax +44 (0)1792 485537
www.enfis.com
info@enfis.com

